

|         |       |      |
|---------|-------|------|
| Projet: | Type: | Qté: |
|---------|-------|------|

Emergency light remote heads Singel 5W 5-24VDC

The single-head remote emergency light is an efficient and cost-effective solution for emergency corridor lighting. Compatible with a 3.6V to 24V DC power supply, these compact models are designed for smaller spaces requiring a single lighting point. It mounts directly onto a junction box and is powered by the centralized emergency system (emergency battery). Its rugged ABS housing and clear PMMA lens ensure optimal durability and performance in indoor environments. It provides increased visibility even in emergency situations.

CARACTERISTICS

- Adjustable aiming angle with horizontal and vertical swivel.
- Compact and robust design: Durable ABS construction with a PMMA lens, ideal for confined spaces requiring a single light source.
- Simple installation: Mounts directly onto a junction box, simplifying installation in corridors and small spaces.
- Large range of options: single-head 2W or 5W, and double-head 2W (2x2W) or 10W (2x5W).



NOMENCLATURE

| SERIE       | VER. |
|-------------|------|
| ZZ          |      |
| Accessories |      |

PHOTOMETRIC SPECIFICATIONS

|                       |                  |
|-----------------------|------------------|
| LUMENS                | 350              |
| CCT                   | 6500K            |
| ANGLE                 | 95°              |
| C.R.I.                | 80               |
| DIMMABLE              | N/A              |
| PHOTOCELL             | N/A              |
| SENSOR                | N/A              |
| LUMEN MAINTENANCE L70 | N/A              |
| LED TYPE              | SMD 3030         |
| LED QTY               | 8                |
| LED VOLTAGE           | 3.2V             |
| LED MAX CURRENT       | 1.56A            |
| FLICKER               | Not Flicker-Free |

MECHANICAL SPECIFICATIONS

|                  |               |
|------------------|---------------|
| HOUSING MATERIAL | ABS           |
| HOUSING FINISH   | White         |
| LENS MATERIAL    | Polycarbonate |
| LENS FINISH      | Clear         |
| WEIGHT           | 0.15 KG       |
| OPERATING TEMP.  | -20°C ~ 45°C  |
| APPLICATION      | Indoor        |

ELECTRICAL SPECIFICATIONS


|              |         |
|--------------|---------|
| REAL POWER   | 5 W     |
| VOLTAGE      | 5-24V   |
| EFFICIENCY   | 70 lm/w |
| POWER FACTOR | 90 %    |
| T.H.D        | N/A %   |
| FREQUENCY    | N/A     |

CERTIFICATIONS

|                                    |              |
|------------------------------------|--------------|
| REGULATORY LISTING                 | cUL          |
| EFFICIENCY LISTING                 | N/A          |
| DLC ID                             |              |
| FCC                                | No           |
| BARCODE                            | 882110008585 |
| ENVIRONMENTAL                      | IP20         |
| IK PROTECTION                      | N/A          |
| SURGE PROTECTION WITH GROUNDING    | N/A          |
| SURGE PROTECTION WITHOUT GROUNDING | N/A          |

|              |               |
|--------------|---------------|
| INSTALLATION | Surface Mount |
| CABLE LENGTH | N/A           |

DIMENSIONS

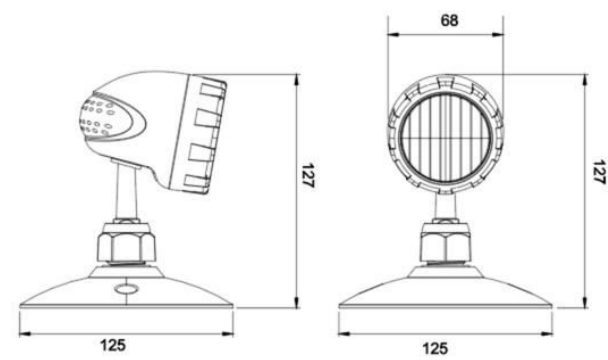

PACKAGING

| DIMENSION INNER CARTON        | DIMENSION OUTER CARTON         | QUANTITY MASTER | MASTER WEIGHT | PALLET QUANTITY                                                                         |
|-------------------------------|--------------------------------|-----------------|---------------|-----------------------------------------------------------------------------------------|
| 14.00 cm X 13.00 cm X 8.30 cm | 44.20 cm X 40.80 cm X 35.20 cm | 36              | 6.80 kg       | 864  |
| 5 1/2 " X 5 1/8 " X 3 1/4 "   | 17 3/8 " X 16 1/8 " X 13 7/8 " |                 | 14.99 lbs     |                                                                                         |

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7